
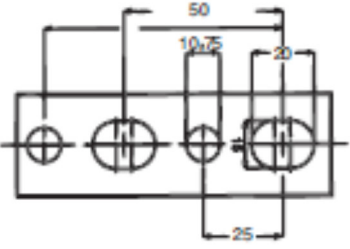


PRODUCT DATA SHEET – 3050x0010

As of: 24.10.2017

Article number:	T20 - 305020010 T30 - 305050010 T45 - 305080010
	
Product name:	Gebhardt-Stahl support sections
Field of application:	For mounting air-ducts, suspension of roof elements
Producing:	Cold rolled profiling
Material:	Strap steel 1,75 mm, zinc-coated, according DIN EN 10346
Unit:	Bundle a 500 m, length 5.000 mm
Measurement:	T20 – C-profile 8,5/20/30/20/8,5 x 1,75 mm T30 – C-profile 8,5/30/30/30/8,5 x 1,75 mm T45 – C-profile 8,5/45/30/45/8,5 x 1,75 mm
Quality:	<p>Oval hole 20 x 15 mm and hole 10,75 mm changing</p> <p>Kombi</p> 
Weight:	T20 - 1,000 kg/m T30 - 1,268 kg/m T45 - 1,668 kg/m

The intention of this product leaflet is to provide non-binding information and should only be interpreted as such. The information takes the current state of technical developments and developments in the chemical industry. We reserve the right to make modifications relating to the product as well as to develop it further. No liability on our part can be derived from this. Users should check the suitability of the product for the intended purpose by conducting their own tests.

Frame load capacity:	„l“	0,40	0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,50	3,00
	T 20	190	130	95	80	65	55	50	45	40		
	T 30	370	250	190	150	125	110	95	80	75	60	50
	T 45	500	330	250	200	170	140	125	110	100	80	65

l = horizontal distance between the threaded rods in meter

Remark:

Ceiling attachment by means of dowels in concrete (min. Bn 250), suspension by means of threaded rod, screw connection below the support section by means of nut and counter-nut.

Threaded rods necessary: up to 180 kg – M6, up to 320 kg – M8, up to 500 kg – M10, up to 700 kg – M12

The intention of this product leaflet is to provide non-binding information and should only be interpreted as such. The information takes the current state of technical developments and developments in the chemical industry. We reserve the right to make modifications relating to the product as well as to develop it further. No liability on our part can be derived from this. Users should check the suitability of the product for the intended purpose by conducting their own tests.