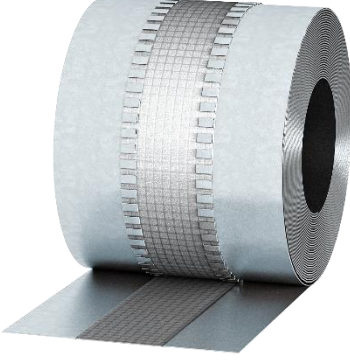


Article number/ Available dimensions:	309050010 – 45/60/45 309060010 – 65/95/65	
Product name:	Gebhardt flexible duct connectors - Fibreglass/Alu	
Description:	The flexible duct connector consist of aluminium coated fiberglass fabric. The fabric is enclosed between two galvanized steel sheets. The connection guarantees a lasting hold and persistent air tightness. The fold is interrupted at regular intervals, which simplify the bending and forming of the duct connectors.	
Fabric:	Fibreglass	
Coating:	Aluminium foil – single sided; thickness 18 µm	
Colour:	Silver grey	
Unit:	Boxes a 25 m	
Weight:	approx. 670 gr./m ²	
Temperature resistance	-30 °C / +180 °C	
Properties:	UV-resistant	
Steel tape:	Galvanized steel - thickness: 0,4 mm	
Dimensions:	Fabric/material:	60, 95, mm
	Sheet metal:	45, 65 mm

The intention of this product leaflet is to provide non-binding information and should only be interpreted as such. The information takes the current state of technical developments and developments in the chemical industry. We reserve the right to make modifications relating to the product as well as to develop it further. No liability on our part can be derived from this. Users should check the suitability of the product for the intended purpose by conducting their own tests.

Remarks:	<ul style="list-style-type: none">• Free from silicone• Free from cadmium• Free from halogen
----------	--