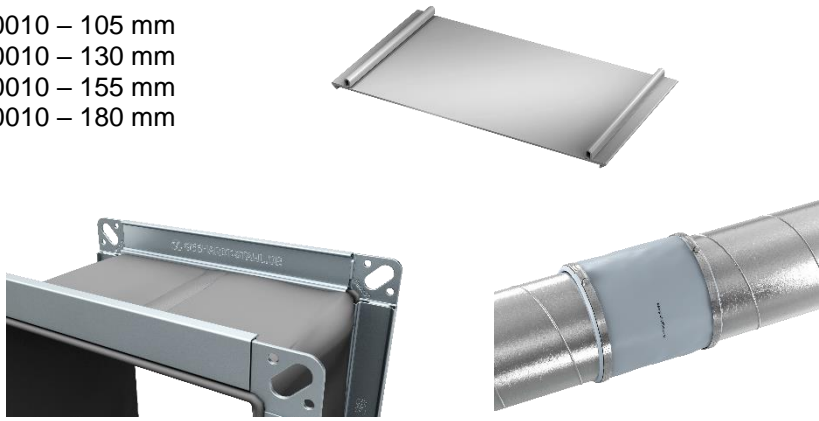


<p>Article number/ Available dimensions:</p>	<p>309730010 – 105 mm                  309740010 – 130 mm                  309750010 – 155 mm                  309760010 – 180 mm</p> 
<p>Product name:</p>	<p>GEBHARDT flex.x-PVC B2</p>
<p>Description:</p>	<p>Special-PVC with sealing lips on both sides for building rectangular flexible duct connectors. Extruded PVC in one piece. Also suitable for round compensators</p>
<p>Material:</p>	<p>PVC-P (extruded PVC)</p>
<p>Colour:</p>	<p>grey</p>
<p>Dimensions/Weight:</p>	<p>105 mm – 0,28 kg/m                  130 mm – 0,33 kg/m                  155 mm – 0,39 kg/m                  180 mm – 0,45 kg/m</p>
<p>Temperature resistance</p>	<p>-30°C / +80 °C</p>
<p>Fire resistance</p>	<p>normal flammable according to DIN 4102 - B2</p>
<p>UV-resistance:</p>	<p>Yes                  (colour changes of the fabric can appear by high solar effect or high temperatures)</p>
<p>Ozone-resistance</p>	<p>Yes</p>
<p>DIN EN ISO 846</p>	<p>Laboratory tested to DIN EN ISO 846                  The material meets the hygienic requirements according to VDI 6022 and is suitable for use in ventilation systems</p>

The intention of this product leaflet is to provide non-binding information and should only be interpreted as such. The information takes the current state of technical developments and developments in the chemical industry. We reserve the right to make modifications relating to the product as well as to develop it further. No liability on our part can be derived from this. Users should check the suitability of the product for the intended purpose by conducting their own tests.

Qualities:	Very good mechanical resistance
PU:	Rolls à 70 m Pallets à 350 m
Contents:	<ul style="list-style-type: none"><li>● Free from silicone</li><li>● Free from cadmium</li><li>● Phtalate free</li><li>● Odourless</li></ul>